



SEMIFLEXIBLE SOLAR PANEL

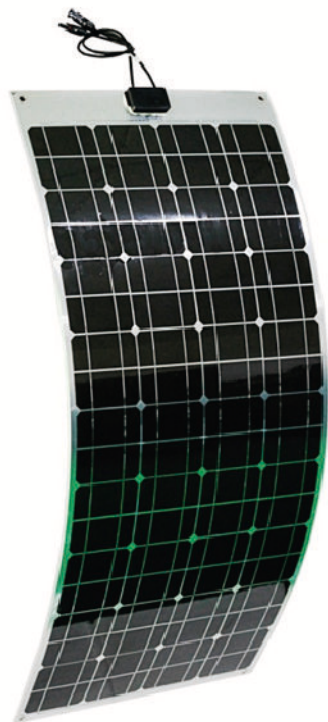

Features:

- ◆ High efficient mono /polycrystalline solar cells
- ◆ 6V/9V/12V/18V/24V/36V solar panels are available in wide range of wattages
- ◆ High resistant to rain, water, abrasion and hail impact
- ◆ Laminated with TPT + Oxide aluminum+EVA+PET + EVA + Silicon cell + EVA+ PET, more reliable
- ◆ Lightweight & Flexible
- ◆ Virtually Unbreakable (No Glass)
- ◆ Power ranges from 10W~200W
- ◆ Voltage, power, dimension can be customized

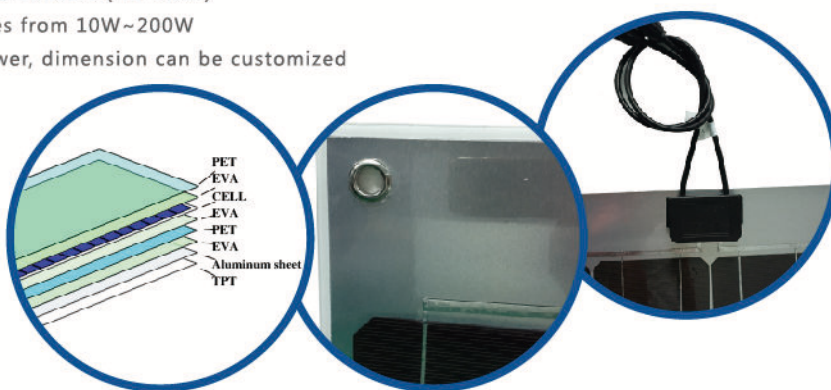

Electrical Parameters:

Model No.	Peak Power(Wp)	Dimension(mm)	Unit Weight(Kg)	Voltage at Pmax Vmp(V)	Current at Pmax Imp(A)	Open Circuit Voltage Voc(V)	Short Circuit Current Isc(A)
XHH-F010	10	670*210*2.8	0.8	18	0.56	21.6	0.62
XHH-F015	15	865*210*3.5	1.2	18	0.83	21.6	0.91
XHH-F020	20	580*370*3.5	1.5	18	1.15	21.6	1.27
XHH-F030	30	780*370*3.5	2	18	1.67	21.6	1.84
XHH-F035	35	875*370*3.5	2.2	18	1.95	21.6	2.15
XHH-F040	40	680*530*3.5	2.3	18	2.23	21.6	2.45
XHH-F045	45	750*530*3.5	2.5	18	2.52	21.6	2.77
XHH-F050	50	810*530*3.5	2.6	18	2.78	21.6	3.06
XHH-F055	55	875*530*3.5	2.8	18	3.07	21.6	3.38
XHH-F060	60	940*530*3.5	3	18	3.34	21.6	3.67
XHH-F065	65	1010*530*3.5	3.2	18	3.89	21.6	4.28
XHH-F070	70	1070*530*3.5	3.5	18	3.89	21.6	4.28
XHH-F075	75	1135*530*3.5	3.6	18	4.17	21.6	4.59
XHH-F080	80	1200*530*3.5	3.8	18	4.45	21.6	4.9
XHH-F090	90	1080*700*3.5	3.8	18	5	21.6	5.5
XHH-F100	100	1280*540*3.5	4	18	5.56	21.6	6.12
XHH-F110	110	1310*700*3.5	4.2	18	6.12	21.6	6.73
XHH-F120	120	1410*700*3.5	4.5	18	6.67	21.6	7.34
XHH-F140	140	1700*700*3.5	5	18	7.78	21.6	8.56
XHH-F150	150	1700*700*3.5	5	18	8.33	21.6	9.16
XHH-F170	170	2000*700*3.5	5.2	36	4.73	43	5.2
XHH-F180	180	2100*700*3.5	5.5	36	5	43	5.5
XHH-F200	200	2280*700*3.5	6	36	5.56	43	8.1